

10/520602

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
22 January 2004 (22.01.2004)

PCT

(10) International Publication Number  
WO 2004/007123 A1

(51) International Patent Classification<sup>7</sup>: B22D 37/00,  
11/10

(21) International Application Number:  
PCT/EP2003/007241

(22) International Filing Date: 7 July 2003 (07.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
MI2002A001507 10 July 2002 (10.07.2002) IT

(71) Applicant (for all designated States except US): DANIELI  
& C. OFFICINE MECCANICHE S.P.A. [IT/IT]; Via  
Nazionale, 41, I-33042 Buttrio (IT).

(72) Inventors; and

(75) Inventors/Applicants (for US only): BOTHAM, W.,

Brian [GB/GB]; Town Street 103, Lound, Sheffield (GB).  
ZOMERO, Gianni [IT/IT]; Via Alpi, 22, I-33030 Pasian  
di Prato (IT). DE LUCA, Andrea [IT/IT]; Via Malignani,  
13/6, I-33047 Remanzacco (IT).


(74) Agent: GERVASI, Gemma; Notarbartolo & Gervasi  
S.p.A., Corso di Porta Vittoria, 9, I-20122 Milan (IT).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,  
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,  
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

[Continued on next page]

(54) Title: DEVICE FOR THE DISCHARGING MOLTEN METAL FROM A CONTAINER

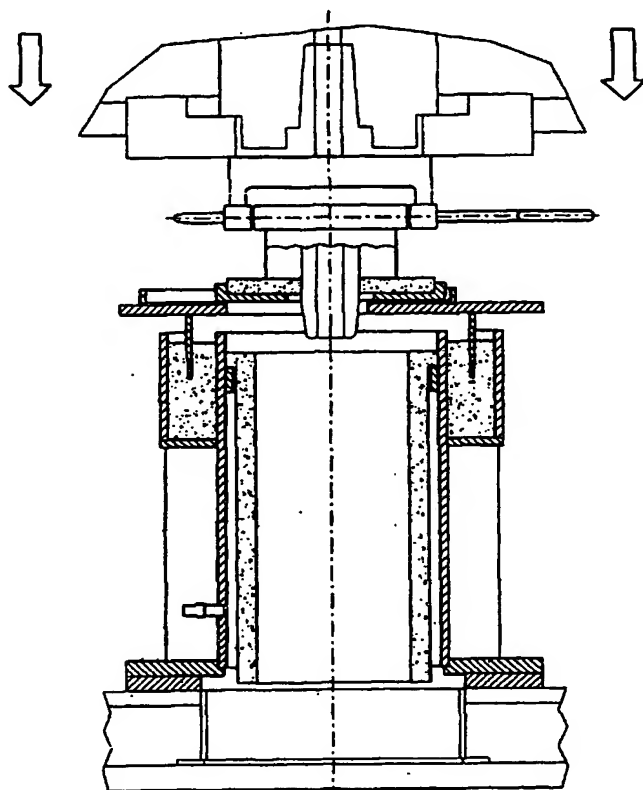

(57) Abstract: An discharging device for molten metal between an upper ladle (1) and a tundish (3) comprising a slide valve nozzle fixed to the base of the ladle, comprising an upper fixed nozzle (42) and a mobile one below (43), inserted into an opening in the base of said slide valve nozzle with the lower end protruding from it, and a ring shaped blade (46) fixed to the base of the slide valve nozzle around said aperture. The tundish (3) comprises a cylindrical jacket (22) placed with a vertical axis and fitted at its end with a sand joint (24) for sealing gas into which the ring shaped blade is sunk (46). The slide valve nozzle can be fixed to the base of the ladle by mountings (48, 49) fitted with eyelets into which pivots (50) are inserted.

WO 2004/007123 A1